

BE-516G

IP Surveillance
Equipment

HD-SDI / 3G-SDI
Equipment

AHD / TVI / CVI
Equipment

HDMI / VGA
Equipment

Speed Dome Camera

Matrix Switcher Solutions



Description Features:

- * Multi-function You can input the camera title, time, video distribution, and enhanced video power
- * Character synthesis input technology, the camera name can display any country text (Chinese, English, Arabic, etc.)
- * Character graphics can be overlaid anywhere on the screen
- * Built-in high-precision clock can be superimposed on the screen at any position
- * The setting software can be executed through the computer, and RS - 2 32 serial ports can be used to set the graphic characters
- * When the image voltage changes, the superimposed graphics characters stable, clear, there will be no beating phenomenon
- * Black and white on the white side of the way to highlight the graphic character, not light or screen
- * 2U standard aluminum alloy card host shell

Model

BE-516G 16 Channel Input (Modular Type)

Power supply


BE-516G AC110V

Dimensions

BE-516G 430(W) x 88(H) x 160(D)mm

Specification

Graphics overlay feature	White background black border, stable, clear
Graphics input mode	Remote software edit input
Overlay pictures	128 x 16 Pixels
Superposition time	Built-in high-precision time generator
Video signal to noise ratio	> 75dB
Video bandwidth	> 12 MHz
Communication interface	RS485 / RS232
Enter the capacity	16 channels
Signal distribution	1 input / 2 output
Video magnification output	0.8VP-p — 2VP-p (75Ω)
Operating temperature	-10°C - +55°C
Working humidity	< 90% (Non-condensing)
power supply	AC110V/20W 60HZ

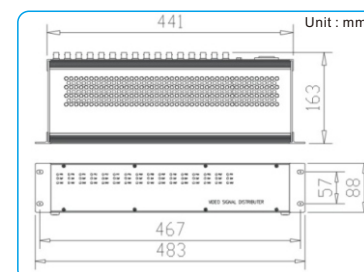

Video Access Technology Corp.

4F.-11, No.6, Lane 609, Sec. 5, Chongxin Rd., Sanchong Dist., New Taipei City, Taiwan (Tong Cheng Industrial Zone)

Tel: +886-2-2999-8383 Fax: +886-2-2999-0303

web : www.videoaccess.com