


VMI-MF01TXRX

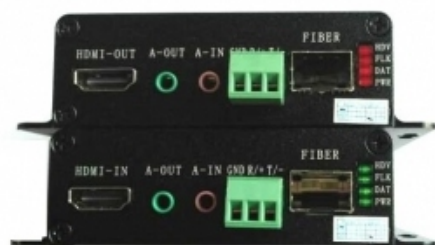

Features:

- * Support 1 channel HDMI video embedded audio signal
- * HDMI input automatic detection
- * HDMI 1.4 Support
- * TMDS Support (2.25Gbps)
- * RS485 or RS232 Support
- * Resolution : 720p/1080i/1080p, up to 1920x1200 60Hz Support
- * Support plug and play function

Specification	VMI-MF01TXRX
Model	1 channel HDMI signal Transmitter and Receiver
Input interface	HDMI-(DVI)
Output interface	HDMI-(DVI)
Optical Type	Wavelength : 1310/1550nm
Max. Distance	0~10Km
Connector	LC (SFP)
Transmitted power	-5dbm ~ -10dbm
Maximum Receiving Sensitivity	-28dBm
Support Input Format	720P : 25/29.97/30/50/59.94/60Hz 1080I : 50/59.94/60Hz 1080P : 23.98/24/25/29/30/50/59.94/60Hz 800x600 / 1024x768 / 1400x1050 / 1366x768 / 1440x900 / 1600x1200 up to 1920x1200 60Hz
DATA comm. method	None
Power Supply	DC12V 1A / (8~25VDC Support)
Power Consumption	3 Watts
Operating Temperature	32°F ~ 104°F / 0°C ~ 50°C
Relative Humidity	20~90% RH (Non-condensation)
Dimension	18X108X28mm